

# JOEL RIGGING GALLERY LOCKING RAIL

## Gallery Mounted

Supports JOEL Rigging Rope locks and the write-on strips to identify linesets.

Rope locks are mounted to 3" x 2" x 5/16" angle, the write-on strip is mounted at an angle for easy viewing.

Constructed to withstand a 500 lbs per linear foot (744.5 kg/m) up load (RWL).

Write-on strips can be written on using erasable marker or grease pencil.

Mounts to the edge of a counterweight pit or gallery.

Mounting method must be able to withstand the imposed load.

Mounting stanchions are located on 5' (1.52m) (maximum) centers and made from 2" x 3" x 5/16" steel angle.




The Standard configuration comes with:

## FEATURES

- Top face drilled for JOEL Rope Locks, to suit linset centres
- 12" tall Kick plate
- Continuous write-on strips
- Painted Black
- Optional: Top face drilled to suit eye bolts for tie offs
- Optional: Capstan HSS tube (inplace of kickplate)

# JOEL RIGGING GALLERY LOCKING RAIL

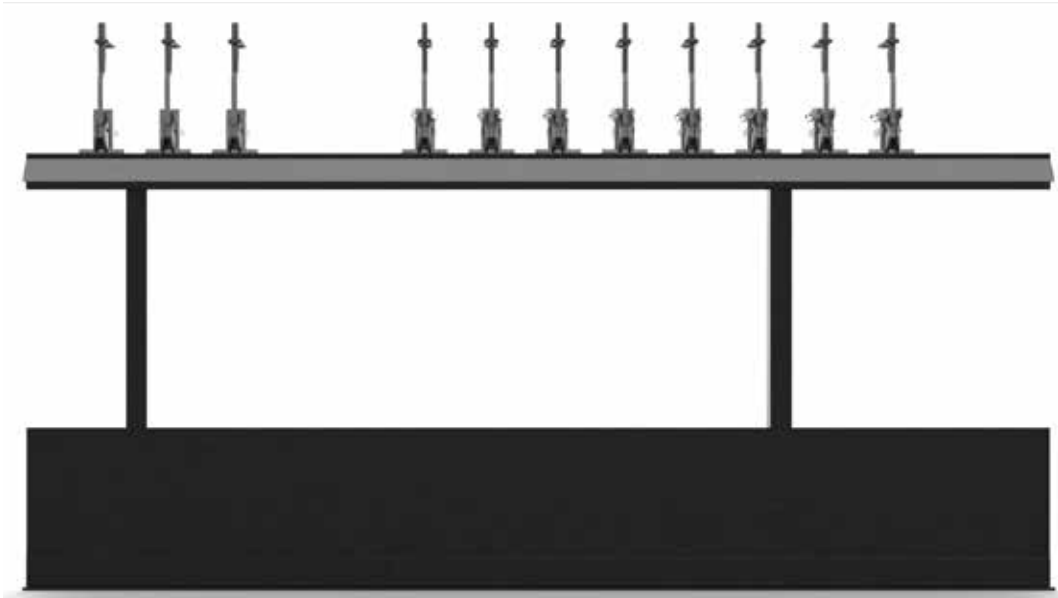

FRONT VIEW



SIDE VIEW

